

4000342

hot street - dirt track

Mercedes M102 cosworth

I-4cyl 2.3L 16v DOHC (DT/DT)



intake **exhaust**


camshaft data:

lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 293°	284°
duration @ 1.0mm	: 246°	238°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 51°	47° / 11°
valve lift @ TDC	: 3.15mm	2.60mm

parts setup:

cam wheels :	:	:
follower	: CC007	: CC007
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99310	: 99310
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E12009	: PAC-E12009
interior spring	: PAC-I12009	: PAC-I12009
fitted load / length	: 32kg @ 33.5mm	: 32kg @ 33.5mm
max. load / lift	: 102kg @ 14.0mm	: 102kg @ 14.0mm

REMARKS :

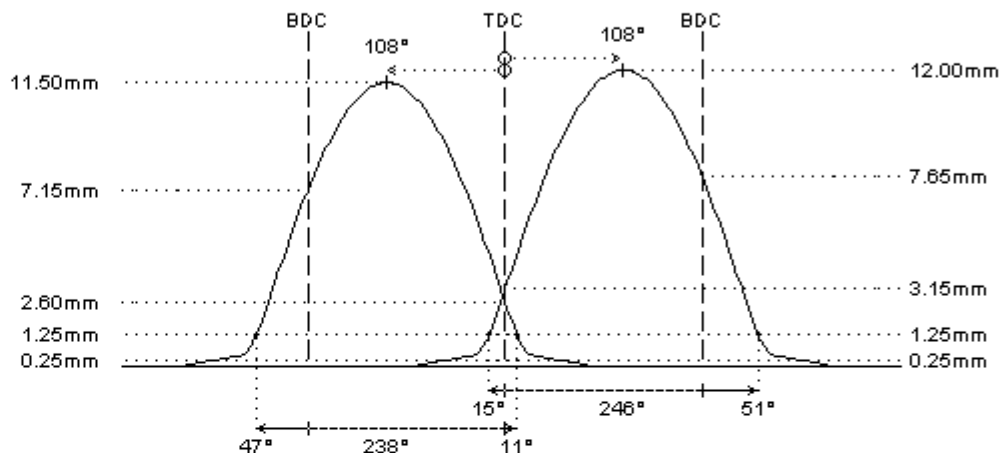

REMARKS :

- # - steel billet camshafts
- front bearing / gear assembly not available
- camshafts also fit 2.5L engine

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake

- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors