

# 2250125

tarmac rally - race

Ford Twin Cam

I-4cyl 1.6L 8v DOHC (DT/DT)




	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 307°	307°
duration @ 1.0mm	: 268°	268°
valve lift	: 13.00mm	13.00mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 29° / 59°	59° / 29°
valve lift @ TDC	: 4.95mm	4.95mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: <b>✗ not available</b>	: <b>✗ not available</b>
lower retainer	: <b>✗ not available</b>	: <b>✗ not available</b>
exterior spring	: <b>✗ not available</b>	: <b>✗ not available</b>
interior spring	:	:
fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

#### REMARKS :

# original valve spring info is not available

# valve spring kit can be developed on request

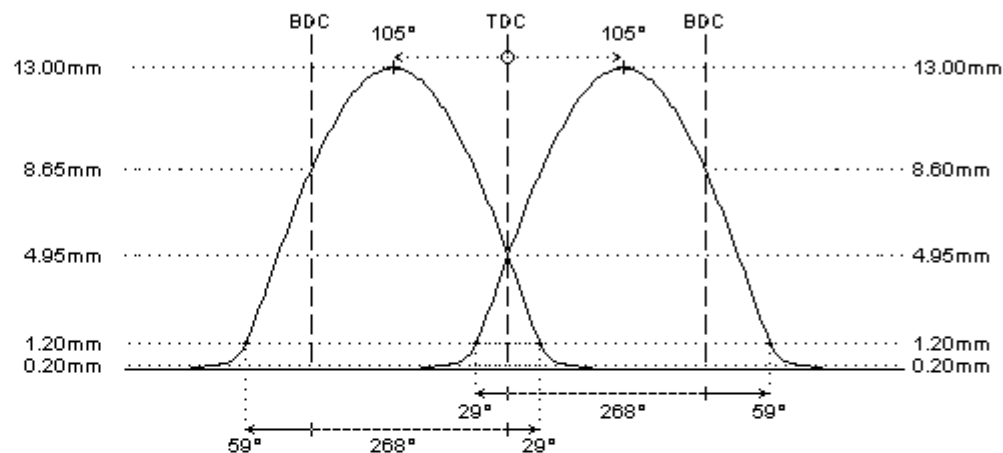

#### REMARKS :

# FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:

- the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
- distance between valve seal and retainer at full lift must be 0.6mm at least
- minimum valve spring travel of 1.0mm at full lift must be provided
- distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake

# ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors