

2280710

hot street - dirt track

Ford DH20 RS2000 16v

I-4cyl 2.0L 16v DOHC (DTH/DTH)



intake **exhaust**

camshaft data:


lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 277°	269°
duration @ 1.0mm	: 243°	236°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 14° / 49°	46° / 10°
valve lift @ TDC	: 2.90mm	2.40mm

parts setup:

cam wheels :	: 🔍 TFO002	: 🔍 TFO002
follower	: 🔍 CC017	: 🔍 CC017
valve lash	: 🔍 TS102	: 🔍 TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99456/s	: 99456/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: 🔍 PAC-S90015	: 🔍 PAC-S90015
interior spring	:	

fitted load / length	: 30kg @ 38.0mm	: 30kg @ 38.0mm
max. load / lift	: 77kg @ 12.5mm	: 77kg @ 12.5mm

REMARKS :

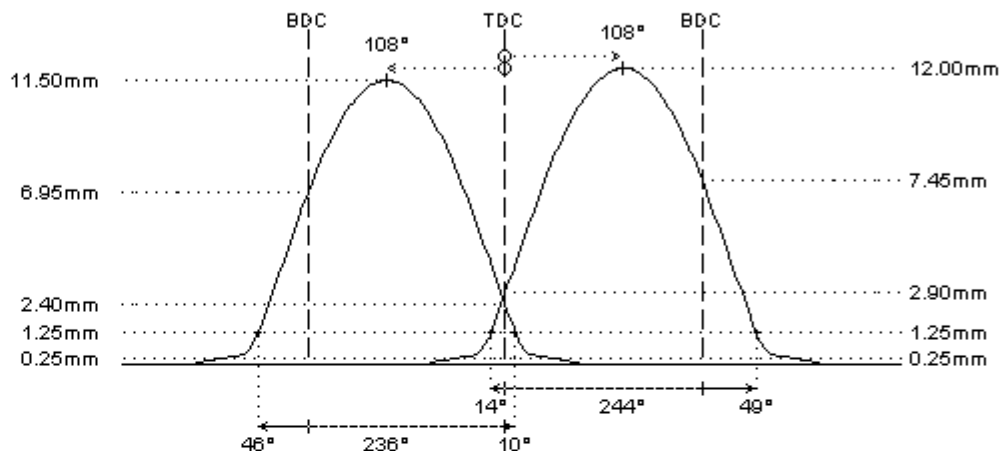

REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors