

2290639


hot street - dirt track

Ford CYBA, CYBB 145hp duratec

I-4cyl 2.0L 16v DOHC (DTx/DTx)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 277°	269°
duration @ 1.0mm	: 243°	236°
valve lift	: 12.00mm	11.50mm
cam lift	: 12.00mm	11.50mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 16° / 47°	44° / 12°
valve lift @ TDC	: 3.20mm	2.65mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99423/s	: 99423/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99862	: PAC-E99862
interior spring	:	:
fitted load / length	: 29kg @ 35.0mm	: 29kg @ 35.0mm
max. load / lift	: 82kg @ 12.5mm	: 82kg @ 12.5mm

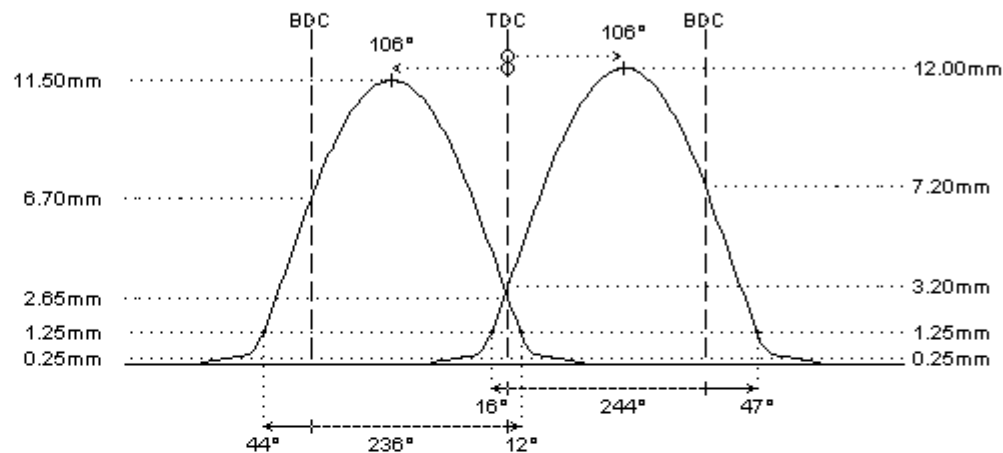

REMARKS :

- # available on casting or steel billet (without trigger on intake)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

REMARKS :

- # double spring PAC-D19864 recommended over 8000rpm (machining of cylinder head and special lower retainer and valve seal may be required)