

# 1900437

sport


Fiat 836 A3.000 Fiat Tipo 16v + Lancia Delta integrale

I-4cyl 2.0L 16v DOHC (DTs/DTs)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.25mm	0.20mm
duration @ 0.1mm	: 286°	256°
duration @ 1.0mm	: 235°	224°
valve lift	: 10.90mm	9.80mm
cam lift	: 10.90mm	9.80mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 6° / 49°	42° / 2°
valve lift @ TDC	: 1.85mm	1.35mm
<b>parts setup:</b>		
cam wheels :	:  CTFI036	:  CTFI036
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 53kg @ 34.7mm	: 53kg @ 34.7mm
max. load / lift	: 95kg @ 10.5mm	: 95kg @ 10.5mm

REMARKS :

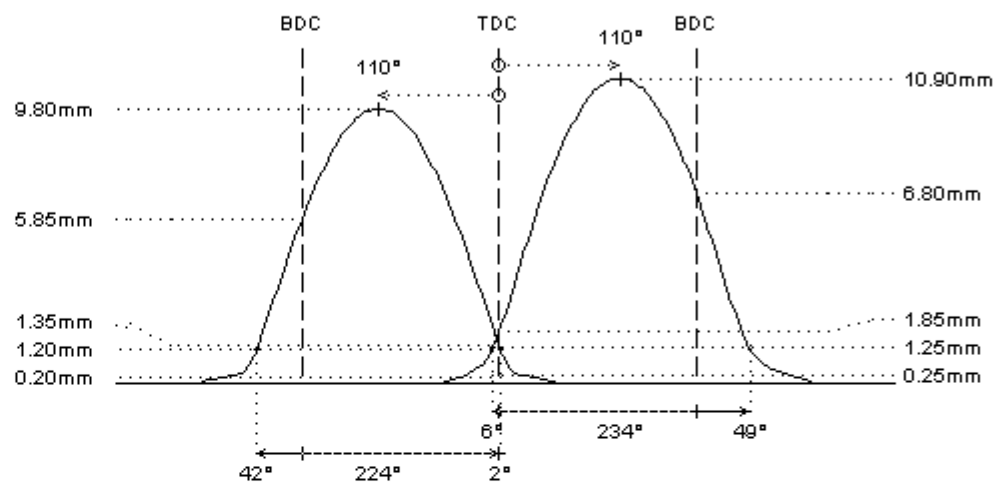

**REMARKS :**

- # These camshafts can also be used in:  
160 A5.000 (1756cc) / 154 E1.000 (1995cc) / M607 AA.18.0 (1995cc) / M619 AA2.0 (1995cc turbo)
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors