

1700407


tarmac rally - race

Ferrari 308 GTB

V-8cyl 3.0L 16v DOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 307°	298°
duration @ 1.0mm	: 268°	260°
valve lift	: 13.00mm	12.50mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 29° / 59°	55° / 25°
valve lift @ TDC	: 5.00mm	4.40mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	✗ not available	✗ not available
lower retainer :	✗ not available	✗ not available
exterior spring :	✗ not available	✗ not available
interior spring :		
fitted load / length :	0kg @ 0.0mm	0kg @ 0.0mm
max. load / lift :	0kg @ 0.0mm	0kg @ 0.0mm

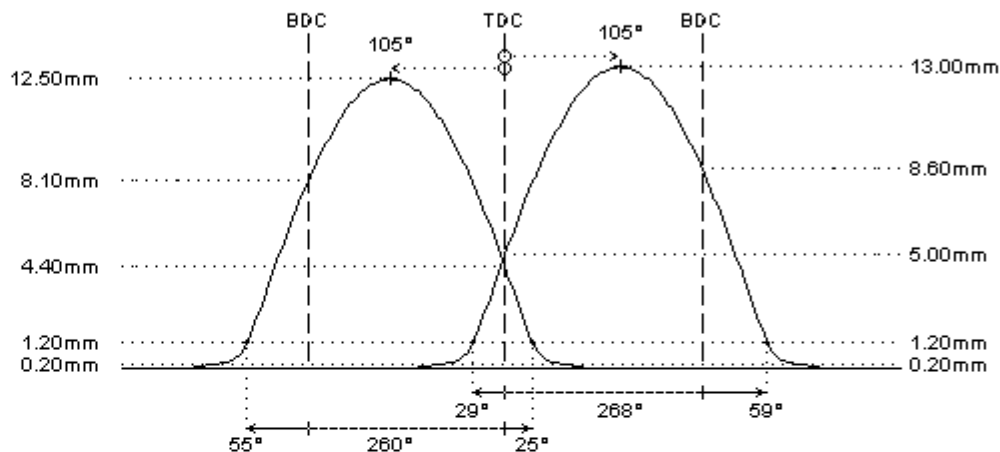

REMARKS :

- # - steel billet camshafts
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # original valve spring info is not available
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

REMARKS :

- # original valve spring info is not available
- # valve spring kit can be developed on request