

1321856


full race

Citroën TU5J4 120hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 297°	297°
duration @ 1.0mm	: 266°	266°
valve lift	: 12.55mm	12.55mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 28° / 58°	58° / 28°
valve lift @ TDC	: 4.50mm	4.45mm
parts setup:		
cam wheels :	CTPE001	CTPE001
follower :	CC018	CC018
valve lash :	TS101	TS101
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	99311/s	99311/s
lower retainer :	O.E.M.	O.E.M.
exterior spring :	PAC-S90015	PAC-S90015
interior spring :		
fitted load / length	: 33kg @ 36.8mm	: 33kg @ 36.8mm
max. load / lift	: 82kg @ 12.5mm	: 82kg @ 12.5mm

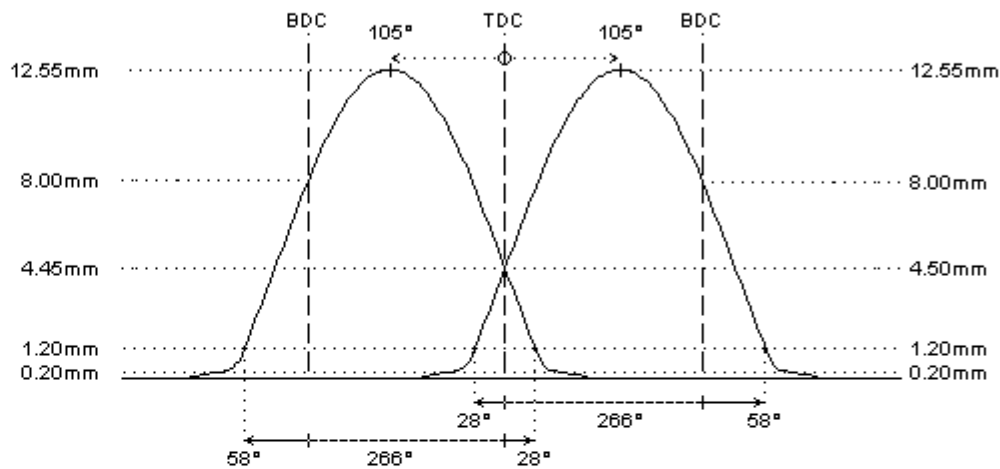

REMARKS :

- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # - valve clearance is to be adjusted using mechanical lash caps
 - please make sure that the lash cap does not touch the valve locks !
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors

REMARKS :

Inlet Valves:

9249007 d6.00 // D28.8 // L104.6

Exhaust Valves:

9249006 d6.00 // D26.0 // L104.2 Oversize

9249016 d6.00 // D24.5 // L104.2

#