

4901203

hot street - dirt track


Citroën TU3JP

I-4cyl 1.4L 8v SOHC (RPR/RPR)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 272°	272°
duration @ 1.0mm	: 236°	236°
valve lift	: 11.65mm	11.65mm
cam lift	: 6.65mm	6.65mm
lobe angle	: 109°	109°
timing @ 1.0mm	: 9° / 47°	47° / 9°
valve lift @ TDC	: 2.10mm	2.10mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S10011	: PAC-S10011
interior spring	:	:
fitted load / length	: 37kg @ 37.5mm	: 37kg @ 37.5mm
max. load / lift	: 100kg @ 12.5mm	: 100kg @ 12.5mm

REMARKS :

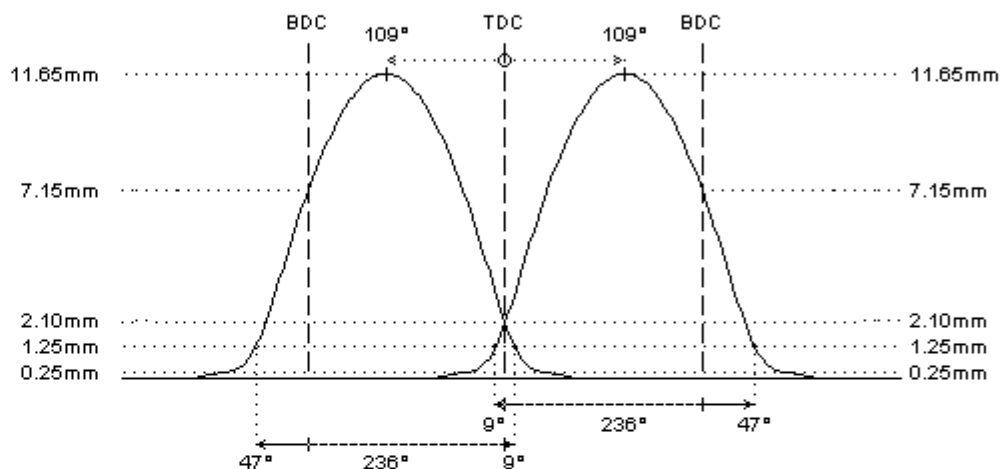

REMARKS :

- # In the TU roller engine, at least two different O.E.M. Camshaft types are being used:
1/ 27,65mm base circle - 5,90mm cam lift
2/ 30,00mm base circle - 5,25mm cam lift
When ordering, please indicate the type of camshaft of your engine.
For camshafts with higher cam lift, the base diameter is reduced to slide through the bearings during installation
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors