

# 1301804

sport


Bmw S54 B32 338hp, double vanos

I-6cyl 3.2L 24v DOHC (RP/RP)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 280°	272°
duration @ 1.0mm	: 242°	234°
valve lift	: 12.50mm	12.25mm
cam lift	: 12.50mm	12.25mm
lobe angle	: 132°	83°
timing @ 1.0mm	: -11° / 73°	20° / 34°
valve lift @ TDC	: 0.50mm	6.00mm
<b>parts setup:</b>		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	O.E.M.	O.E.M.
fitted load / length	: 28kg @ 40.5mm	: 28kg @ 40.5mm
max. load / lift	: 85kg @ 13.0mm	: 85kg @ 13.0mm

REMARKS :

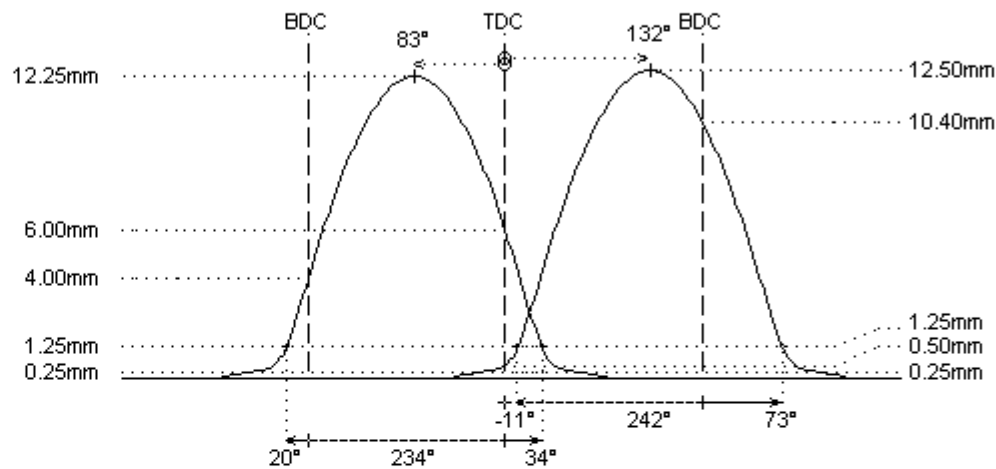

**REMARKS :**

- # available in cast iron or steel billet (on request)
- # The VANOS (VVT) system on the intake camshaft changes the PD from 132° to 72°. The data are shown for full intake retard (disengaged VVT).  
The VANOS (VVT) system on the exhaust camshaft changes the PD from 83° to 128°. The data are shown for full exhaust retard (disengaged VVT).
- # Check distance between valves and piston to be 1mm at least with VVT engaged. Wrong installation will cause severe engine damage!
- # ECU reprogramming advised