

# 1003501


hot street - dirt track

Audi ABC 1st generation: 8mm valves

V-6cyl 2.6L 12v SOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 284°	284°
duration @ 1.0mm	: 244°	244°
valve lift	: 12.00mm	12.00mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: 12° / 52°	52° / 12°
valve lift @ TDC	: 2.80mm	2.75mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	:  CC005	:  CC005
valve lash	:  TS103	:  TS103
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	:  99379	:  99379
lower retainer	:  not available	:  not available
exterior spring	:  PAC-E99859	:  PAC-E99859
interior spring	:  PAC-I99859	:  PAC-I99859
fitted load / length	: 36kg @ 35.0mm	: 36kg @ 35.0mm
max. load / lift	: 103kg @ 12.5mm	: 103kg @ 12.5mm

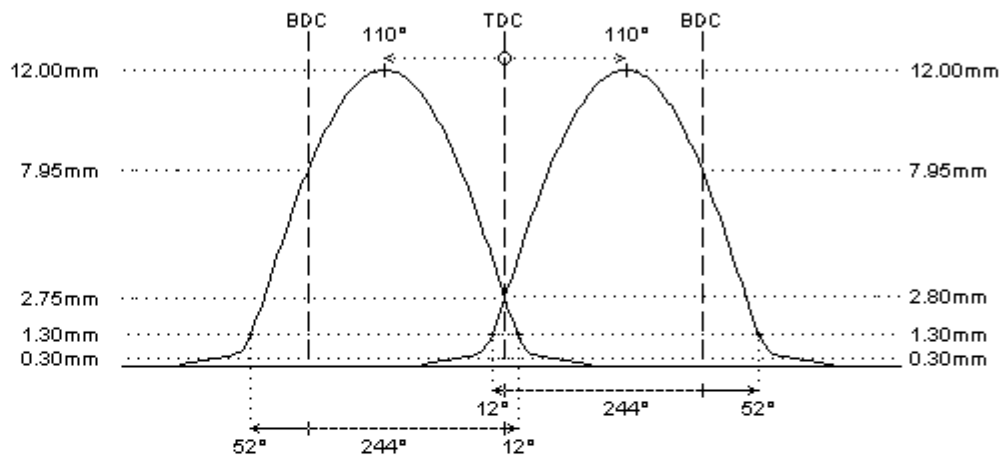

### REMARKS :

- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors

### REMARKS :

- # if required, machine cylinder head and / or use solid shims to adjust spring load
- # check distance between valve seal and retainer to be at least 0.6mm at full lift