

# 1034576


tarmac rally - race

Alfa Romeo AR 671.06 140hp, VVT intake

I-4cyl 1.7L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 298°	290°
duration @ 1.0mm	: 260°	252°
valve lift	: 12.50mm	12.00mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 25° / 55°	51° / 21°
valve lift @ TDC	: 4.40mm	3.85mm
<b>parts setup:</b>		
cam wheels :	:  CTAR001	:  CTAR001
follower	:  CC002	:  CC002
valve lash	:  TS102	:  TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	:  99371	:  99371
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-E92009	:  PAC-E92009
interior spring	:  PAC-I92009	:  PAC-I92009
fitted load / length	: 39kg @ 33.0mm	: 39kg @ 33.0mm
max. load / lift	: 100kg @ 12.5mm	: 100kg @ 12.5mm

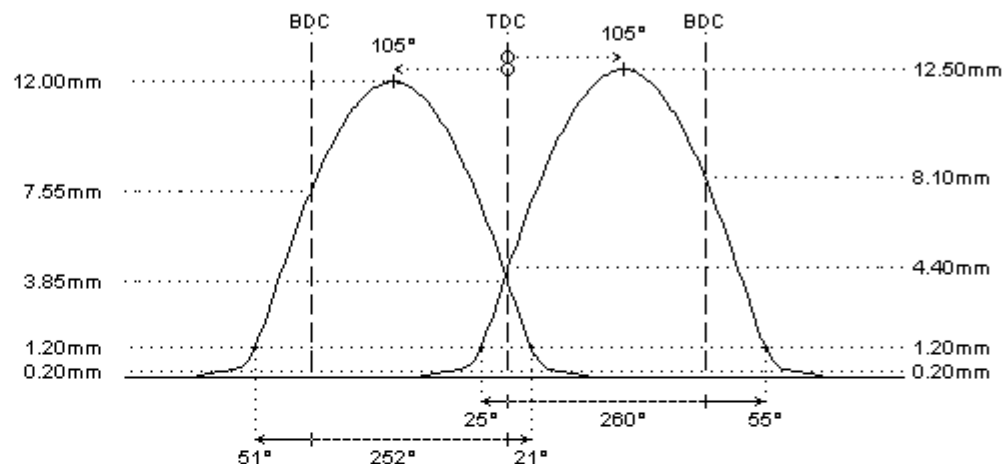

### REMARKS :

- # camshafts for use WITHOUT standard VVT (vanos) system:  
manufactured from MONOBLOCK steel billet for increased strength and stiffness
- # - valve clearance is to be adjusted using mechanical lash caps  
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

### REMARKS :