

7640297


tarmac rally - race

Volkswagen 827 (mechanic tappets, 8mm valves, RK-8H)

(DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 304°	304°
duration @ 1.0mm	: 268°	268°
valve lift	: 13.00mm	13.00mm
cam lift	: 13.00mm	13.00mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 28° / 60°	60° / 28°
valve lift @ TDC	: 4.65mm	4.65mm
parts setup:		
cam wheels :	CCR3232	CCR3232
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	99313	99313
lower retainer	remove	remove
exterior spring	PAC-E99859	PAC-E99859
interior spring	PAC-I99859	PAC-I99859
fitted load / length	: 41kg @ 34.0mm	: 41kg @ 34.0mm
max. load / lift	: 110kg @ 12.5mm	: 110kg @ 12.5mm

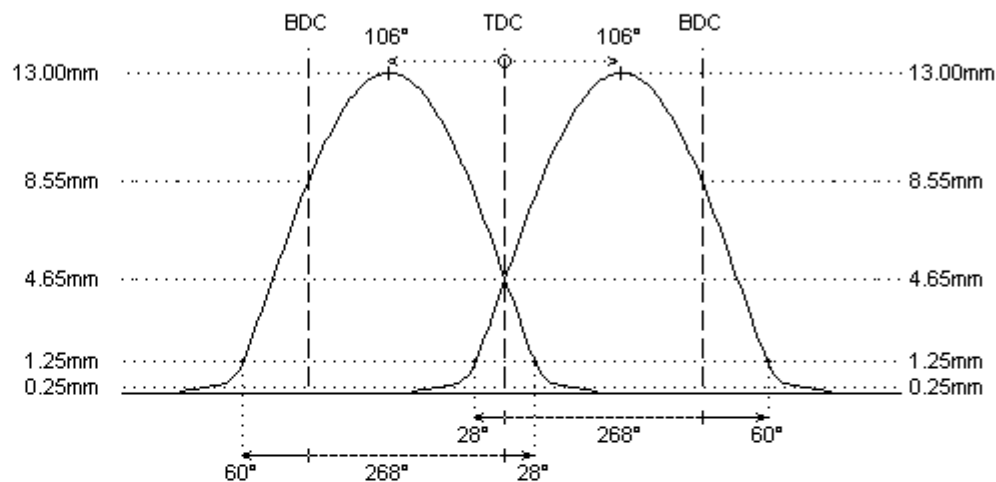

REMARKS :

- # - camshafts for use with original cam followers (35mm) and lash adjustment shim (31mm) between cam follower and cam lobe
- also compatible with race cam followers
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors

REMARKS :

- # if required, machine cylinder head and / or use solid shims to adjust spring load
- # ONLY for 8mm valves with single groove (RK-8H valve keepers)