

7109105

hot street - dirt track

Toyota 7M-GTE

I-6cyl 3.0L 24v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 267°	252°
duration @ 1.0mm	: 238°	222°
valve lift	: 9.50mm	8.50mm
cam lift	: 9.50mm	8.50mm
lobe angle	: 110°	120°
timing @ 1.0mm	: 9° / 49°	51° / -9°
valve lift @ TDC	: 2.05mm	0.45mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: X not available	: X not available
lower retainer	: X not available	: X not available
exterior spring	: X not available	: X not available
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

- # check std valve spring setup for coil bind length and use valve spring kit if required
- # valve spring kit can be developed on request

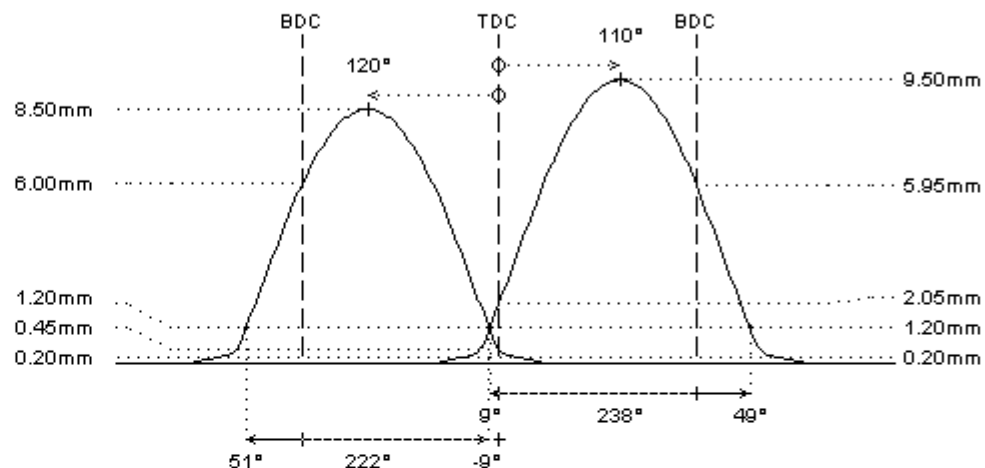

REMARKS :

- # These profiles are designed to run on 28mm tappets with 25mm shims, dedicated profiles for other cam follower setups are available as well