

7103118


tarmac rally - race

Toyota 2T-G Celica 1600 GT 99hp

I-4cyl 1.6L 8v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 280°	280°
duration @ 1.0mm	: 254°	254°
valve lift	: 12.00mm	12.00mm
cam lift	: 12.00mm	12.00mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 21° / 53°	53° / 21°
valve lift @ TDC	: 3.95mm	3.95mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	PAC-E99859	PAC-E99859
interior spring :		
fitted load / length :	0kg @ 0.0mm	0kg @ 0.0mm
max. load / lift :	0kg @ 0.0mm	0kg @ 0.0mm

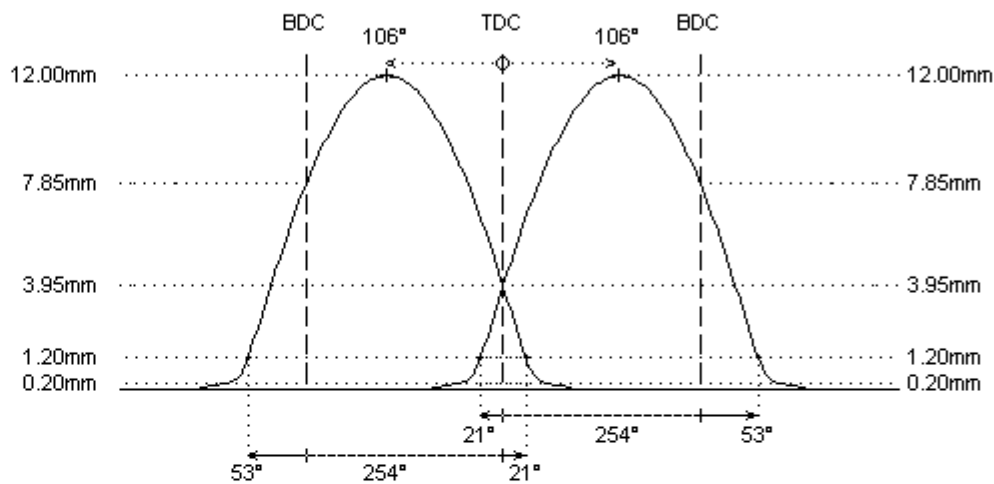

REMARKS :

- # replace STD spring by double spring [ref. 99859] on STD spring retainers. shim spring to fitted length of 34.5-35.5mm

REMARKS :