

6404004

sport

Subaru EG33

B-6cyl 3.3L 24v QOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 266°	266°
duration @ 1.0mm	: 216°	216°
valve lift	: 9.00mm	9.00mm
cam lift	:	
lobe angle	: 116°	113°
timing @ 1.0mm	: -8° / 44°	41° / -5°
valve lift @ TDC	: 0.40mm	0.60mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

- # original valve spring info is not available
- # check std valve spring setup for coil bind length and use valve spring kit if required
- # valve spring kit can be developed on request

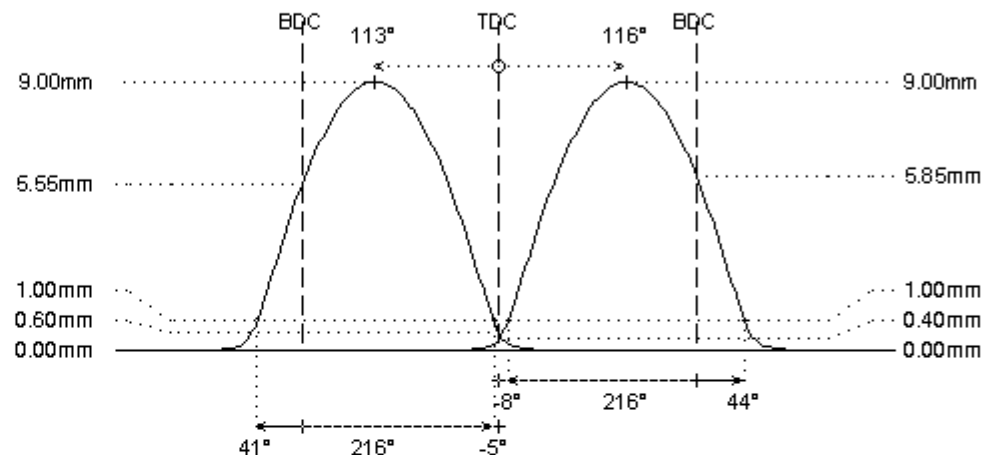

REMARKS :

- # **steel billet camshafts for use in EG33 engine:**
 - exhaust camshafts driven by belt
 - intake camshafts driven by **internal meshed gear**
- MORE PROFILE OPTIONS ON REQUEST
- # ECU reprogramming advised