

5500811


hot street - dirt track

Renault F2, F3

I-4cyl 1.7L 8v SOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 280°	280°
duration @ 1.0mm	: 244°	244°
valve lift	: 10.65mm	10.65mm
cam lift	: 10.65mm	10.65mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 12° / 52°	52° / 12°
valve lift @ TDC	: 2.50mm	2.50mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	O.E.M.	O.E.M.
fitted load / length	: 27kg @ 37.5mm	: 27kg @ 37.5mm
max. load / lift	: 80kg @ 10.5mm	: 80kg @ 10.5mm

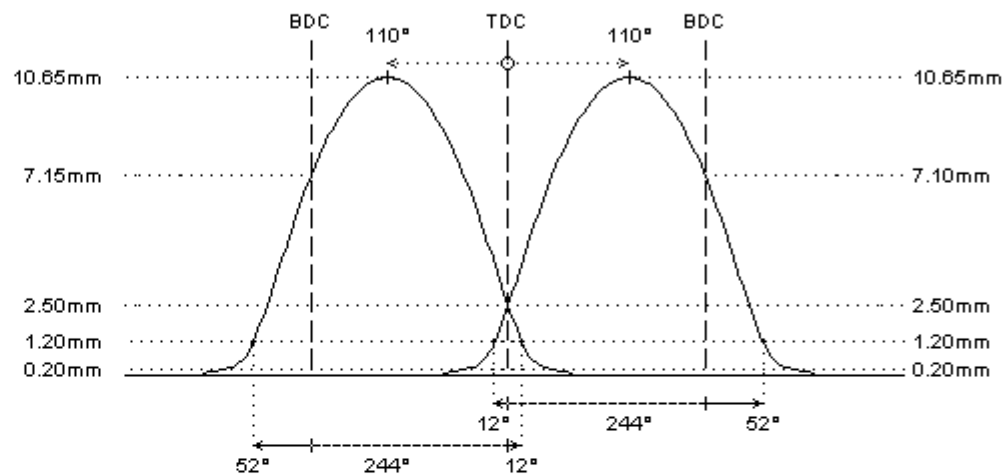

REMARKS :

- # Renault has used many different camshaft specifications. Please indicate following details when ordering:
 - full engine code / year of manufacturing
 - camshaft code: drilled markings in the middle of the camshaft (example: 5+2 dots)
 - STD cam base diameter (33mm or 36mm) + cam height
 - type of lash adjustment shim: 31.5mm (centered at outside) or 35.0mm (centered at inside)

REMARKS :