

# 5221213


tarmac rally - race

Porsche 944 S2 / 968

I-4cyl 3.0L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 303°	293°
duration @ 1.0mm	: 268°	258°
valve lift	: 13.45mm	12.75mm
cam lift	:	
lobe angle	: 104°	104°
timing @ 1.0mm	: 30° / 58°	53° / 25°
valve lift @ TDC	: 5.25mm	4.50mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	:  CC005	:  CC005
valve lash	:  TS102	:  TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	:  99322/s	:  99322/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-E95009	:  PAC-E95009
interior spring	:  PAC-I95009	:  PAC-I95009
fitted load / length	: 34kg @ 36.0mm	: 39kg @ 35.0mm
max. load / lift	: 109kg @ 14.0mm	: 109kg @ 13.0mm

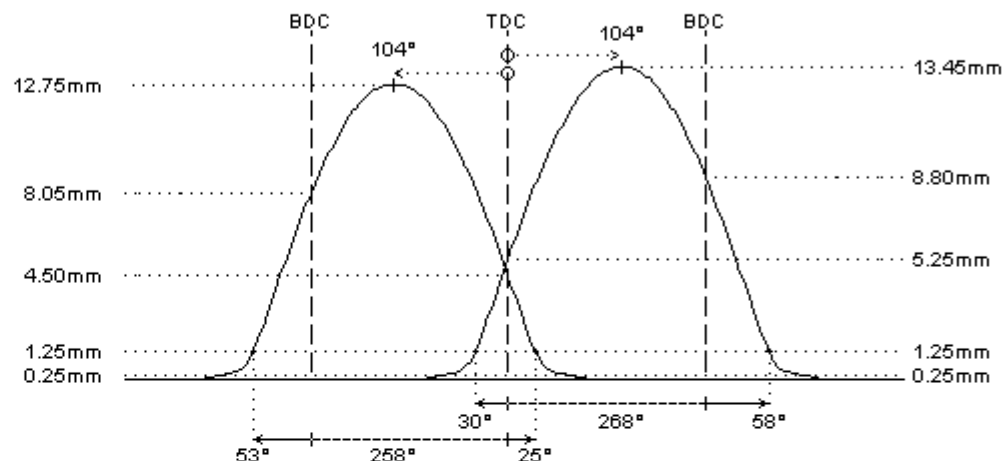

### REMARKS :

- # steel billet camshafts
  - 52202xx: camshafts for use in 944 S2 engine (**19 teeth, no VVT tensioner**)
  - 52207xx: camshafts for use in 968 engine (**18 teeth, VVT tensioner - centerlines vary**)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
  - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
  - distance between valve seal and retainer at full lift must be 0.6mm at least
  - minimum valve spring travel of 1.0mm at full lift must be provided
  - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

REMARKS :