

4610808


hot street - dirt track

Opel C20XE with distributor

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 293°	284°
duration @ 1.0mm	: 246°	238°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 51°	47° / 11°
valve lift @ TDC	: 3.15mm	2.60mm
parts setup:		
cam wheels :	CSK5058	CSK5058
follower	CC004	CC004
valve lash	TS102	TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	99341	99341
lower retainer	remove	remove
exterior spring	PAC-E92009	PAC-E92009
interior spring	PAC-I92009	PAC-I92009
fitted load / length	: 33kg @ 33.5mm	: 33kg @ 33.5mm
max. load / lift	: 94kg @ 12.5mm	: 94kg @ 12.5mm

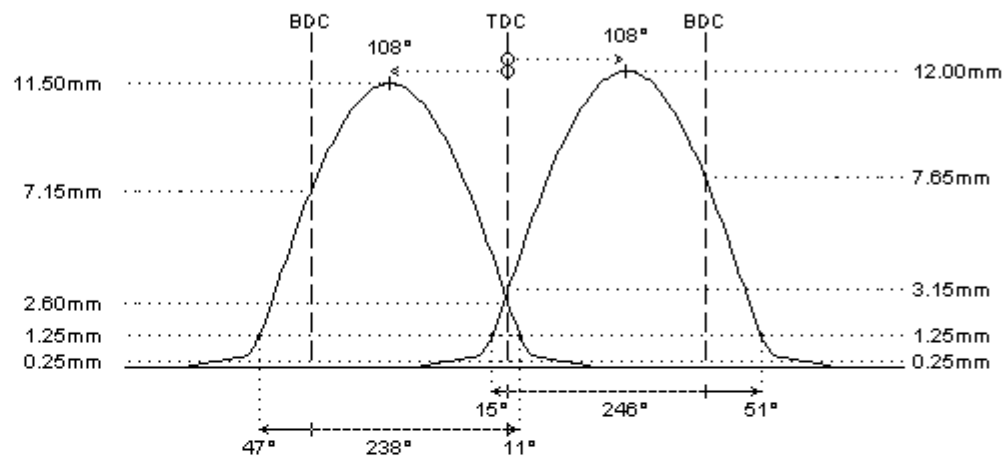

REMARKS :

- # - profiles for conversion to mechanic race cam followers
- camshafts available in cast iron or optional gundrilled steel billet (short competition version without distributor drive end)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

REMARKS :

- # replace OEM lower retainer to obtain a correct installation / fitted length (currently not available)