

4603022


tarmac rally - race

Opel X20XE big block ecotec (X18XE-2.0L-2.2L)

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 298°	290°
duration @ 1.0mm	: 260°	252°
valve lift	: 12.50mm	12.00mm
cam lift	:	
lobe angle	: 104°	104°
timing @ 1.0mm	: 26° / 54°	50° / 22°
valve lift @ TDC	: 4.55mm	4.00mm
parts setup:		
cam wheels :	: CTOPK01	: CTOPK01
follower	: CC004	: CC004
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99145/H	: 99145/H
lower retainer	: remove	: remove
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009
fitted load / length	: 35kg @ 33.0mm	: 35kg @ 33.0mm
max. load / lift	: 97kg @ 12.5mm	: 97kg @ 12.5mm

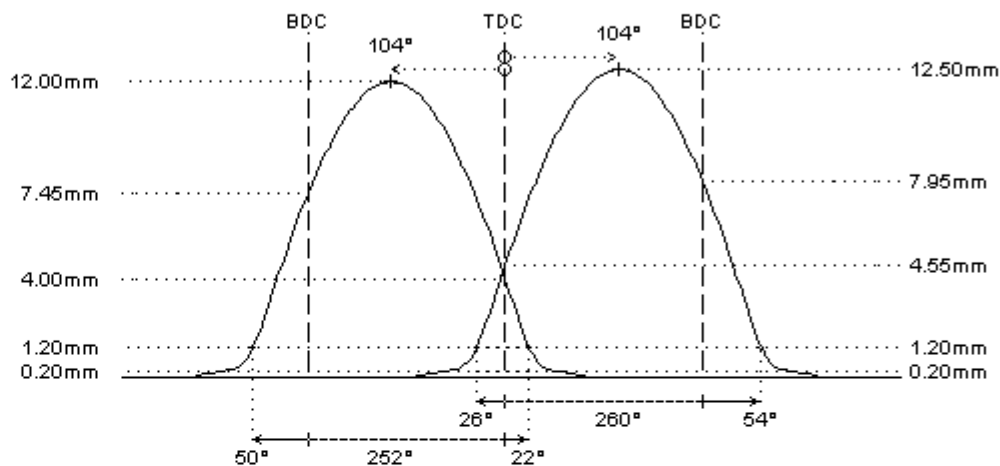

REMARKS :

- # - camshafts for use in X18XE-2.0L-2.2L long block 'ecotec' engines
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

REMARKS :

- # replace OEM lower retainer to obtain a correct installation / fitted length
(currently not available)