

1601216


tarmac rally - race

Nissan CG13DE

I-4cyl 1.3L 16v DOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 286°	278°
duration @ 1.0mm	: 240°	232°
valve lift	: 10.35mm	9.95mm
cam lift	: 10.35mm	9.95mm
lobe angle	: 106°	106°
timing @ 1.0mm	: 14° / 46°	42° / 10°
valve lift @ TDC	: 2.70mm	2.25mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E99862	: PAC-E99862
interior spring	:	:
fitted load / length	: 31kg @ 34.5mm	: 31kg @ 34.5mm
max. load / lift	: 82kg @ 12.0mm	: 82kg @ 12.0mm

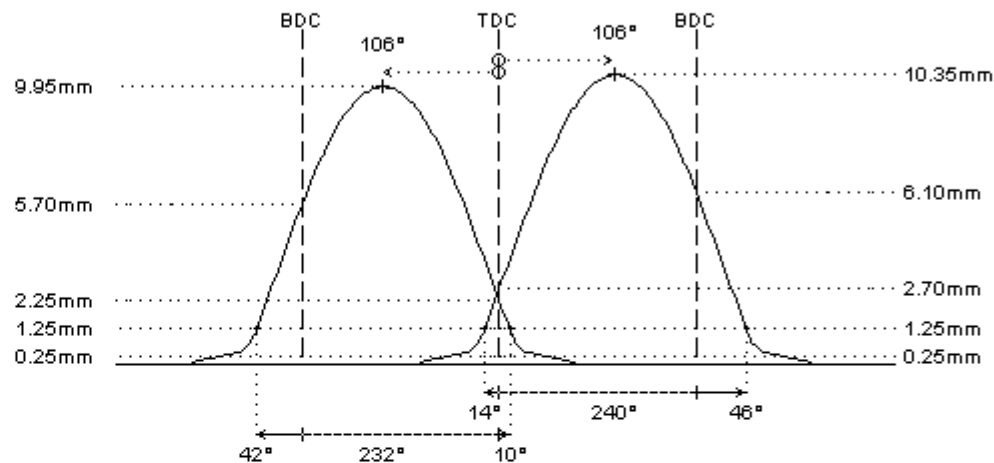

REMARKS :

ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors

REMARKS :