

# 7661207

sport

Volkswagen PL 129hp (catalist)

I-4cyl 1.8L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 261°	261°
duration @ 1.0mm	: 221°	221°
valve lift	: 11.20mm	11.20mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -0° / 41°	40° / 1°
valve lift @ TDC	: 1.00mm	1.10mm

### parts setup:


cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.

fitted load / length	: 35kg @ 31.5mm	: 35kg @ 31.5mm
max. load / lift	: 78kg @ 10.0mm	: 78kg @ 10.0mm

### REMARKS :

# check distance between valve seal and retainer to be at least 0.6mm at full lift

# ONLY for 7mm valves with single groove (RK-7H valve keepers)

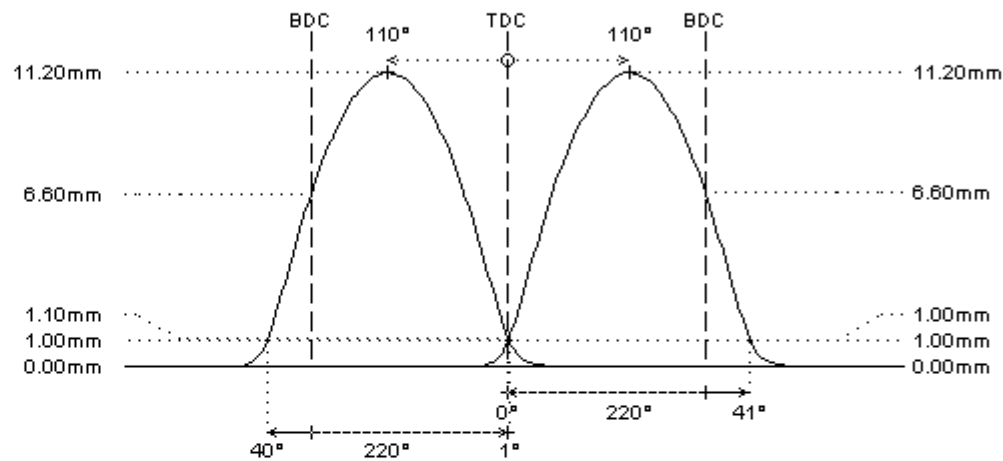

### REMARKS :

# - cast iron camshafts