

1030410

sport

Alfa Romeo


B-4cyl 1.7L 8v SOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 291°	283°
duration @ 1.0mm	: 254°	246°
valve lift	: 10.75mm	10.00mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 19° / 55°	51° / 15°
valve lift @ TDC	: 3.30mm	2.75mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

- # original valve spring info is not available
- # valve spring kit can be developed on request

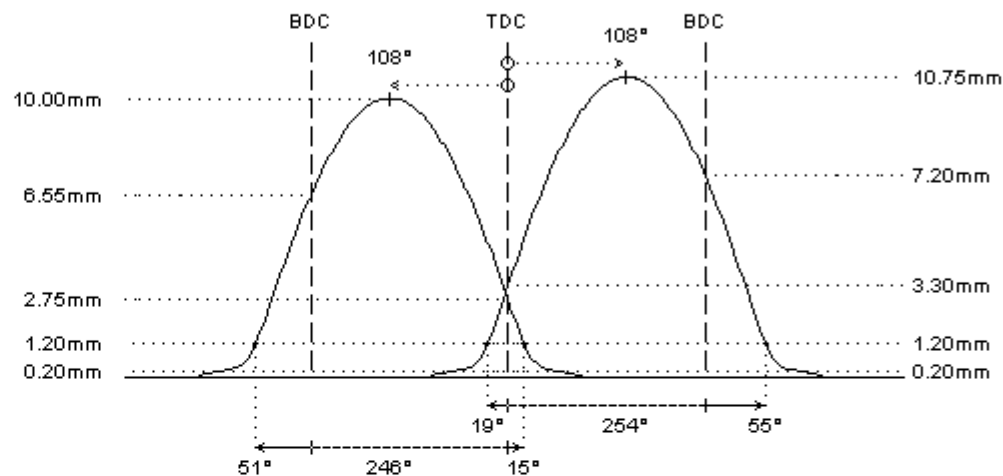

REMARKS :

- # - steel billet camshafts
- bearing dimensions: 34.94 - 46.44 - 46.94mm
- cam followers: mechanic (used in early 1.7L engines, replaced by hydraulic lash adjustment afterwards)