

2701852


hot street - dirt track

Hyundai G4GF

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 284°	278°
duration @ 1.0mm	: 238°	230°
valve lift	: 11.50mm	11.00mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 11° / 47°	43° / 7°
valve lift @ TDC	: 2.60mm	2.10mm
parts setup:		
cam wheels :	:	:
follower	: CC002	: CC002
valve lash	: TS101	: TS101
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99317/s	: 99317/s
lower retainer	: not available	: not available
exterior spring	: PAC-E12009	: PAC-E12009
interior spring	: PAC-I12009	: PAC-I12009
fitted load / length	: 36kg @ 33.3mm	: 38kg @ 32.8mm
max. load / lift	: 106kg @ 14.0mm	: 106kg @ 13.5mm

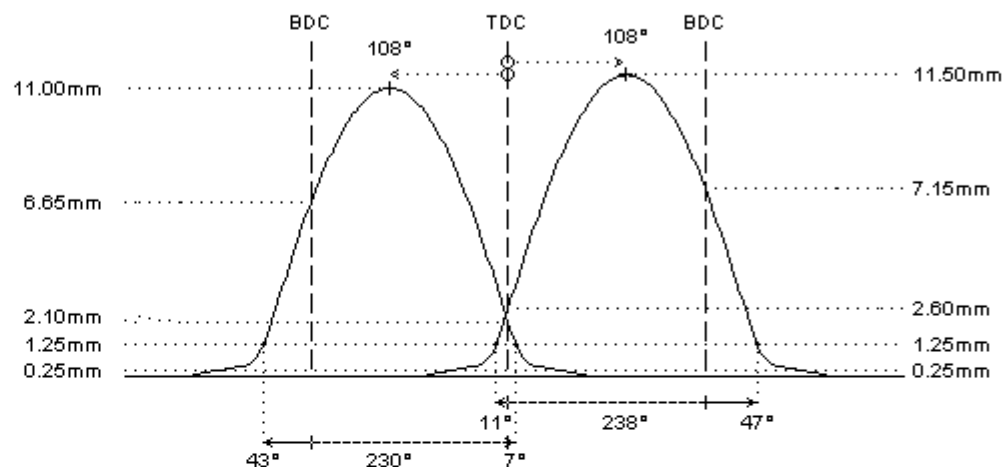

REMARKS :

- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburettors

REMARKS :