

# 2330830


hot street - dirt track

Ford YBB Cosworth 4WD

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 274°	267°
duration @ 1.0mm	: 236°	228°
valve lift	: 10.95mm	10.95mm
cam lift	:	
lobe angle	: 112°	112°
timing @ 1.0mm	: 6° / 50°	46° / 2°
valve lift @ TDC	: 1.75mm	1.20mm
<b>parts setup:</b>		
cam wheels :	:  CSK5119	:  CSK5119
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	:  99366	:  99366
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-E92009	:  PAC-E92009
interior spring	:  PAC-I92009	:  PAC-I92009
fitted load / length	: 35kg @ 33.0mm	: 35kg @ 33.0mm
max. load / lift	: 97kg @ 12.5mm	: 97kg @ 12.5mm

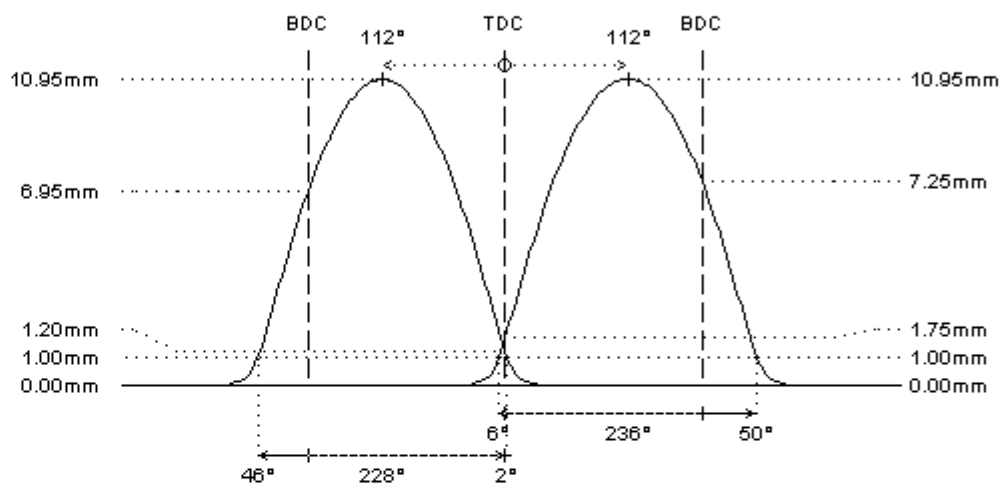

### REMARKS :

- # camshafts for atmospheric (naturally aspirated) engines
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

### REMARKS :