

2290107

hot street - dirt track


Ford Zeta 1.8 - 2.0L, hydro (silvertop)

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 266°	256°
duration @ 1.0mm	: 238°	230°
valve lift	: 10.45mm	10.00mm
cam lift	:	
lobe angle	: 112°	112°
timing @ 1.0mm	: 7° / 51°	47° / 3°
valve lift @ TDC	: 1.80mm	1.35mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90015	: PAC-S90015
interior spring	:	:
fitted load / length	: 33kg @ 37.0mm	: 33kg @ 37.0mm
max. load / lift	: 79kg @ 12.0mm	: 79kg @ 12.0mm

REMARKS :

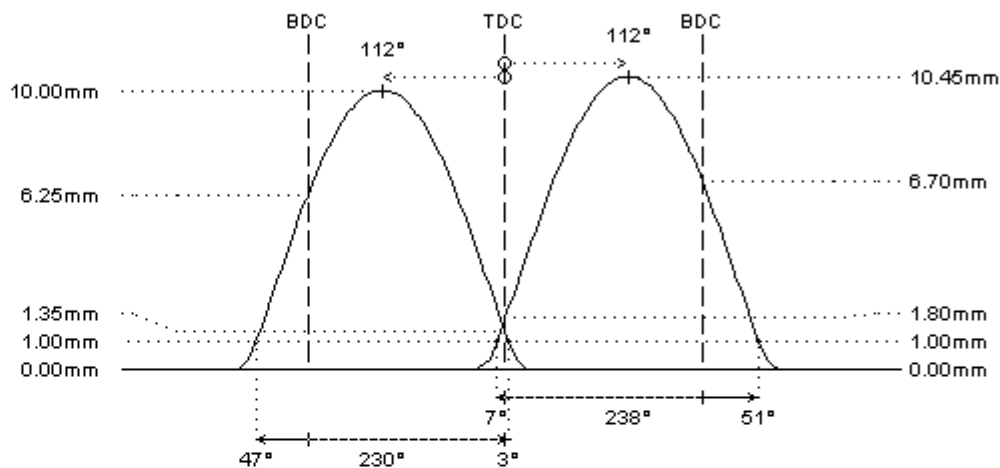

REMARKS :

- # for 1st generation engines with hydraulic tappets, single groove valves and cylindrical valve springs (until '97)
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # massflow or throttle position sensor required for reprogramming, MAP sensor will not function properly