

1002331

sport

Audi AAN, ABY, RR turbo


I-5cyl 2.2L 20v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 242°	258°
duration @ 1.0mm	: 212°	224°
valve lift	: 9.65mm	10.00mm
cam lift	:	
lobe angle	: 108°	116°
timing @ 1.0mm	: -2° / 34°	48° / -4°
valve lift @ TDC	: 0.80mm	0.65mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

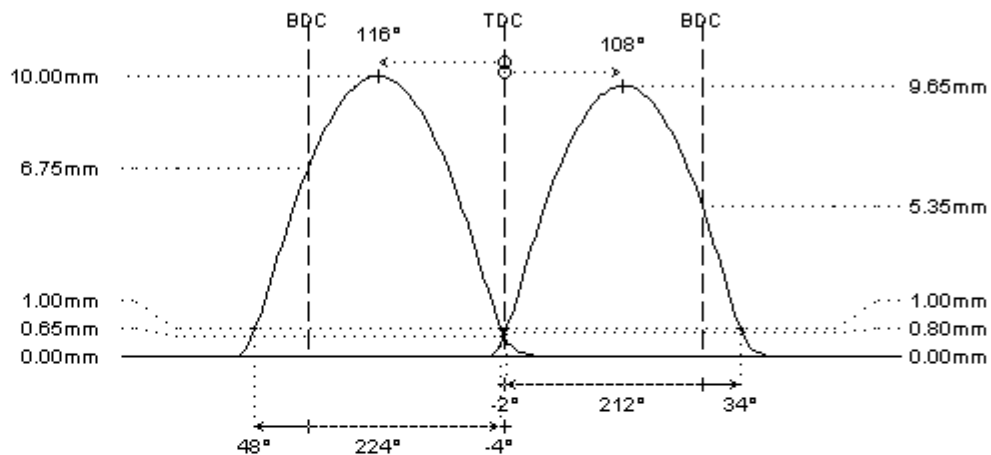

REMARKS :

- # - steel billet camshafts
- supplied with adjustable chain sprockets to optimize intake cam timing