

1031563

hot street - dirt track


Alfa Romeo AR 322.05 140hp, VVT intake

I-4cyl 1.7L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 291°	283°
duration @ 1.0mm	: 253°	244°
valve lift	: 10.75mm	10.00mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 21° / 52°	47° / 17°
valve lift @ TDC	: 3.65mm	3.10mm
parts setup:		
cam wheels :	: CTAR001	: CTAR001
follower	: CC002	: CC002
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 39kg @ 33.8mm	: 39kg @ 33.8mm
max. load / lift	: 77kg @ 10.5mm	: 77kg @ 10.5mm

REMARKS :

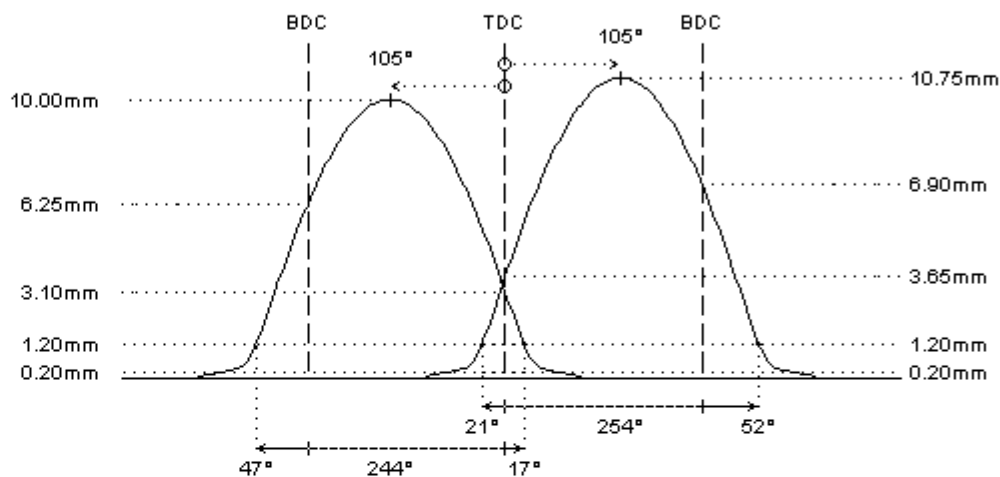

REMARKS :

- # camshafts for use with STD VVT (vanos) system
- # - valve clearance is to be adjusted using mechanical lash caps
- please make sure that the lash cap does not touch the valve locks !
- # FOR COMPETITION APPLICATIONS ONLY. Following details must be verified:
 - the camshafts must turn smooth in the cylinderhead, provide free travel by machining where needed
 - distance between valve seal and retainer at full lift must be 0.6mm at least
 - minimum valve spring travel of 1.0mm at full lift must be provided
 - distance between valve and piston 1.0mm (pref. 1.5mm). check 5-15° before TDC on exhaust, and after TDC on intake
- # ONLY for use in competition engines with independent engine management (throttle position sensor) or carburetors