

# 7900303

sport

Volvo B30

I-6cyl 3.0L 12v OHV



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.40mm	0.40mm
duration @ 0.1mm	: 288°	288°
duration @ 1.0mm	: 240°	240°
valve lift	: 10.85mm	10.85mm
cam lift	: 7.25mm	7.25mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 10° / 50°	50° / 10°
valve lift @ TDC	: 2.45mm	2.45mm


### parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: <b>✗ not available</b>	: <b>✗ not available</b>
lower retainer	: <b>✗ not available</b>	: <b>✗ not available</b>
exterior spring	: <b>✗ not available</b>	: <b>✗ not available</b>
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

### REMARKS :

- # check std valve spring setup for coil bind length and use valve spring kit if required
- # valve spring kit can be developed on request

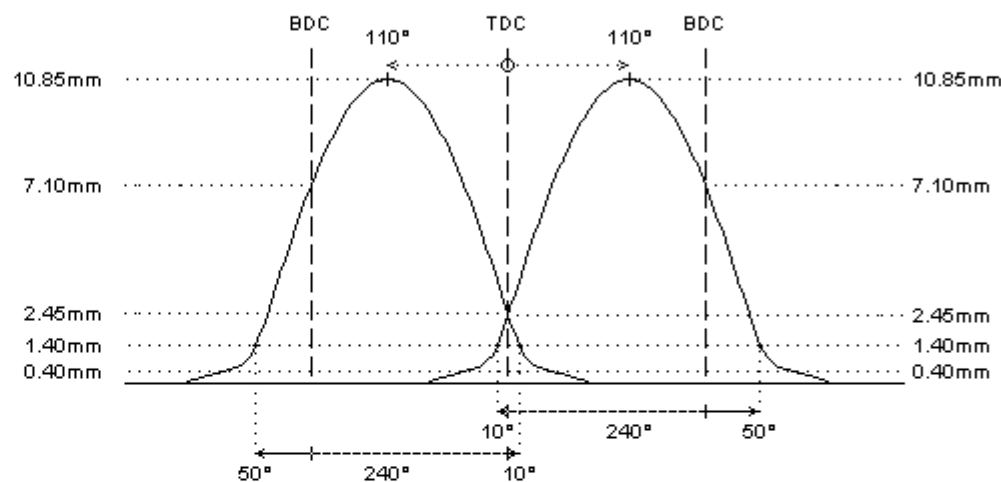

### REMARKS :

- # - These camshafts fit B30 pushrod engines. Volvo has used different camshaft specifications, please check cam base diameter and cam height when ordering sports camshafts. Depending on the engine version and application, extra modifications may be required.
- steel billets with pump lobe between 6nd-7nd cam, and gear between 10th-11th cam