

# 1602502

sport

Nissan SR20DE (T) slipper rocker

I-4cyl 2.0L 16v DOHC (RP/RP)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 273°	266°
duration @ 1.0mm	: 228°	220°
valve lift	: 11.05mm	10.55mm
cam lift	: 7.10mm	6.80mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 6° / 42°	38° / 2°
valve lift @ TDC	: 1.60mm	1.20mm


### parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

### REMARKS :

# check std valve spring setup for coil bind length and use valve spring kit if required

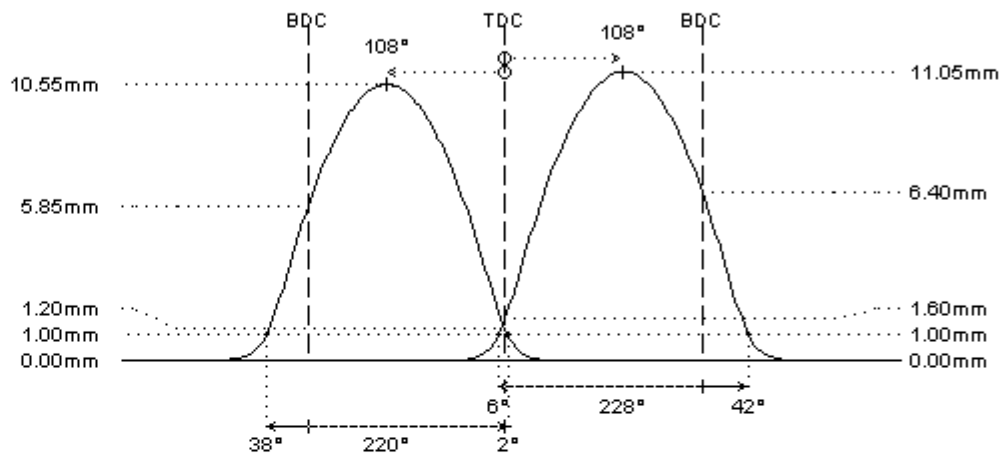

### REMARKS :

# camshaft only for use with slipper rocker arms (NO rollers!) and without VVT system on intake camshaft

# ECU reprogramming required